


ISO A SERIES



- ☞ Manufactured according ISO 7241-A norm, DN13 size meet as well ISO 5675 requirements.
- ☞ Available with Poppet Valve or Ball as closing system.
- ☞ BSP, NPT, SAE/ORB threads, other threads under request.
- ☞ Sectors: Agricultural, Industrial.

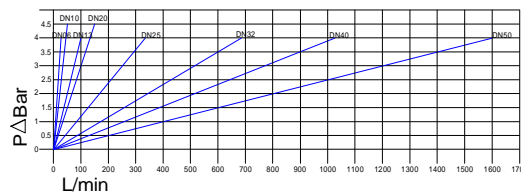


Compatible With: FASTER ANV
PARKER 6600


AEROQUIP FD56
SNAP-TITE 61

Applications:
Designed for Oil Hydraulic Applications according the European Directive 97.23.EC

MATERIAL: Carbon Steel EN10277-3
SEALS: NBR
BACK-UP-RING: PTFE
BALLS: AISI 1010/1015
SPRINGS: Carbon Steel DIN 17233/84(B)



DN	ØA	ABC	Pressure	CH1 mm	C mm	ØF mm	L mm
06	1/4" BSP	101.11111AB	350Bar	19	36	11,80	72
	1/4" NPT	101.11111BB					
	3/8" BSP	101.11112AC					
10	3/8" NPT	101.11112BC	300Bar	22	40,50	17,25	81
	3/8" BSPT	101.11112DC					
	9/16"-18ORB	101.11112GC					
13	1/2" BSP	101.11113AD	300Bar	27	46	20,56	87,50
	1/2" NPT	101.11113BD					
	M22x1.5	101.11113NG					
20	3/4"-16ORB	101.11113GF	250Bar	36	56	29	112
	3/4"-14ORB	101.11113GH					
	1 1/16"-12ORB	101.11114GK					
25	1" BSP	101.11115AF	230Bar	41	63	34,30	126
	1" NPT	101.11115BF					
	1 5/16"-12ORB	101.11115GO					
32	1 1/4" BSP	101.11116AG	230Bar	50	75	44,95	150
	1 1/4" NPT	101.11116BG					
	1 1/2" BSP	101.11117AH					
40	1 1/2" NPT	101.11117BH	200Bar	60	83,50	55	167
	2" BSP	101.11118AI					
	2" NPT	101.11118BI					

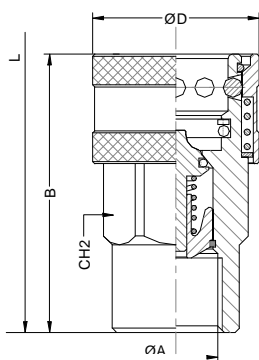

DN	ØA	ABC	Pressure	CH2 mm	B mm	ØD mm	L mm
06	1/4" BSP	101.12111AB	350Bar	19	51	26	72
	1/4" NPT	101.12111BB					
	3/8" BSP	101.12112AC					
10	3/8" NPT	101.12112BC	300Bar	24	58,50	32	81
	3/8" BSPT	101.12112DC					
	9/16"-18ORB	101.12112GC					
13	1/2" BSP	101.12113AD	300Bar	30	63,50	38	87,50
	1/2" NPT	101.12113BD					
	M22x1.5	101.12113NG					
20	3/4"-16ORB	101.12113GF	250Bar	38	83,5	46	112
	3/4"-14ORB	101.12113GH					
	1 1/16"-12ORB	101.12114GK					
25	1" BSP	101.12115AF	230Bar	46	97	55	126
	1" NPT	101.12115BF					
	1 5/16"-12ORB	101.12115GO					
32	1 1/4" BSP	101.12116AG	230Bar	50	117	70	150
	1 1/4" NPT	101.12116BG					
	1 1/2" BSP	101.12117AH					
40	1 1/2" NPT	101.12117BH	200Bar	60	133	84,50	167
	2" BSP	101.12118AI					
	2" NPT	101.12118BI					

SERIES	MATERIAL	PART	CLOSING	O-RING	SIZE	THREAD							
ISO A	101.	1	CARBON ST.	1	MALE	0	WITHOUT	0	WITHOUT	1	1/4"	06	2 letters as per Table Of Threads.
		2	AISI316	2	FEMALE	1	POPPET V.	1	NBR	2	3/8"	10	
		3	AISI303			2	BALL	2	VITON	3	1/2"	13	
		4	BRASS							4	3/4"	20	
										5	1"	25	
										6	1 1/4"	32	
										7	1 1/2"	40	
										8	2"	50	




ООО «Кама-Флекс Гидравлика»


<http://www.oookfg.narod.ru>
e-mail: kama-hydraulic@narod.ru
т/ф (8552) 44-33-58




- Manufactured according ISO 7241-A norm, DN13 size meet as well ISO 5675 requirements.
- BSP, NPT, SAE/ORB threads, other threads under request.
- Sectors: Chemical, Industrial, Offshore Industry.

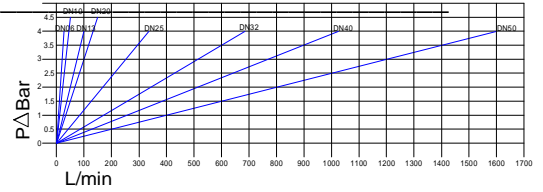


Compatible With:	FASTER ANV PARKER 6600	AEROQUIP FD56 SNAP-TITE 61	Applications: Designed for Oil Hydraulic Applications according the European Directive 97.23.EC	MATERIAL: AISI316, AISI303, Brass DIN-EN 12164
				SEALS: VITON
				BACK-UP-RING: PTFE
				BALLS: AISI 316 W. 14401
				SPRINGS: AISI302 DIN 17224




DN	ØA	Abc	Pressure	CH1 mm	C mm	ØF mm	L mm
	½" BSP (AISI316)	101.21123AD	100Bar				
13	½" BSP (AISI303)	101.31123AD		27	46	20,56	87,50
	½" BSP (BRASS)	101.41123AD	80Bar				



DN	ØA	Abc	Pressure	CH1 mm	C mm	ØF mm	L mm
13	½" BSP M. (AISI316)	107.21123AO	100Bar	27	59	20,56	83



DN	ØA	Abc	Pressure	CH2 mm	B mm	ØD mm	L mm
13	½" BSP (AISI316)	101.22123AD	100Bar	27	68	38	83



DN	ØA	Abc	Pressure	CH2 mm	B mm	ØD mm	L mm
	½" BSP (AISI303)	101.32123AD	100Bar	30			
13					68	38	87,50
	½" BSP (BRASS)	101.42123AD	80Bar	27			

SERIES	MATERIAL	PART	CLOSING	O-RING	SIZE	THREAD							
ISO A	101.	2	AISI316	1	MALE	0	WITHOUT	0	WITHOUT	1	½"	06	2 letters as per Table Of Threads.
		3	AISI303	2	FEMALE	1	POPPET V.	1	NBR	2	¾"	10	
		4	BRASS			2	BALL	2	VITON	3	½"	13	
										4	¾"	20	
										5	1"	25	
										6	1 ¼"	32	
										7	1 ½"	40	
										8	2"	50	




ООО «Кама-Флекс Гидравлика»

<http://www.oookfg.narod.ru>
 e-mail: kama-hydraulic@narod.ru
 т/ф (8552) 44-33-58




- ☞ Manufactured according ISO 7241-A norm, DN13 size meet as well ISO 5675 requirements.
- ☞ Available with Poppet Valve or Ball as closing system.
- ☞ BSP, NPT, SAE/ORB threads, other threads under request.

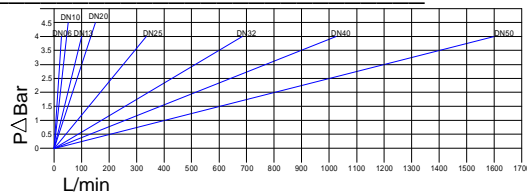

Compatible With:	FASTER ANV PARKER 6600	AEROQUIP FD56 SNAP-TITE 61	Applications: Designed for Oil Hydraulic Applications according the European Directive 97.23.EC	MATERIAL: Carbon Steel EN10277-3
				SEALS: NBR
				BACK-UP-RING: PTFE
				BALLS: AISI 1010/1015
				SPRINGS: Carbon Steel DIN 17233/84(B)

DN	ØA	ABC	Pressure	CH2 mm	B mm	ØD mm	L mm
----	----	-----	----------	--------	------	-------	------

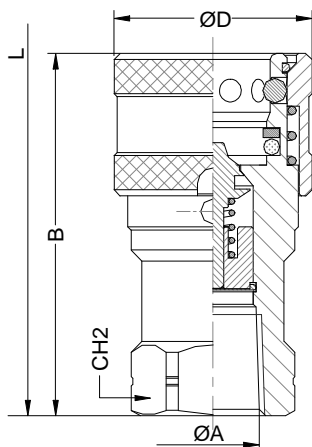

10	3/8" BSPT	129.12112DC	300Bar	24	58,50	32	81
----	-----------	-------------	--------	----	-------	----	----

SERIES	MATERIAL	PART	CLOSING	O-RING	SIZE	THREAD	
ISO A	1	Carbon St.	1 MALE	0 WITHOUT	0 WITHOUT	1 1/4"	06
	2	AISI316	2 FEMALE	1 POPPET V.	1 NBR	2 3/8"	10
	3	AISI303		2 BALL	2 VITON	3 1/2"	13
	4	BRASS				4 3/4"	20
						5 1"	25
						6 1 1/4"	32
						7 1 1/2"	40
						8 2"	50

2 letters as per Table Of Threads.




ООО «Кама-Флекс Гидравлика»

<http://www.oookfg.narod.ru>
 e-mail: kama-hydraulic@narod.ru
 т/ф (8552) 44-33-58




- Manufactured according ISO 7241-A norm, DN13 size meet as well ISO 5675 requirements.
- Standard in Red, other colours under request.
- Designed for the protection of female and male parts during the disconnection.

PLUG



CAP




DN	RED	BLUE	YELLOW	GREEN	BLACK	WHITE
06	101.5311AA	101.5321AA	101.5331AA	101.5341AA	101.5351AA	UNDER REQUEST
10	101.5312AA	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST
13	101.5313AA	101.5323AA	101.5333AA	101.5343AA	101.5353AA	101.5363AA
20	101.5314AA	101.5324AA	101.5334AA	101.5344AA	101.5354AA	UNDER REQUEST
25	101.5315AA	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST

DN	RED	BLUE	YELLOW	GREEN	BLACK	WHITE
06	101.5411AA	101.5421AA	101.5431AA	101.5441AA	101.5451AA	UNDER REQUEST
10	101.5412AA	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST
13	101.5413AA	101.5423AA	101.5433AA	101.5443AA	101.5453AA	101.5463AA
20	101.5414AA	101.5424AA	101.5434AA	101.5444AA	101.5454AA	UNDER REQUEST
25	101.5415AA	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST	UNDER REQUEST




- Manufactured according ISO 7241-A norm, DN13 size meet as well ISO 5675 requirements.
- 3 Types available in 1/2", 3B, 1T y 6B, rest of sizes under request and minimum quantities.
- Designed to park the male parts during the disconnection.

PARKING 3B




DN	ABC	L	ØA
13	101.1533AA	34	32

PARKING 1T




DN	ABC	L	ØA
13	101.1533AC		

PARKING 6B



DN	ABC	L	ØA
13	101.1533AB	38	35

SERIES	MATERIAL	PART	COLOUR	SIZE	STANDARD						
ISO A	101.	1	CARBON ST.	3	PLUG	1	RED	1	1/2"	06	AA AB AC
		5	PLASTIC	4	CAP	2	BLUE	2	3/8"	10	
				5	PARKING	3	YELLOW	3	1/2"	13	
						4	GREEN	4	3/8"	20	
						5	BLACK	5	1"	25	
						6	WHITE	6	1 1/2"	32	
						7		7	1 1/2"	40	
						8		8	2"	50	



**Для получения дополнительной информации
по данному продукту и его модификациям
просим Вас связаться с нами
по тел. (8552) 44-33-58**



ООО «Кама-Флекс Гидравлика»

<http://www.oookfg.narod.ru>
e-mail: kama-hydraulic@narod.ru
т/ф (8552) 44-33-58